

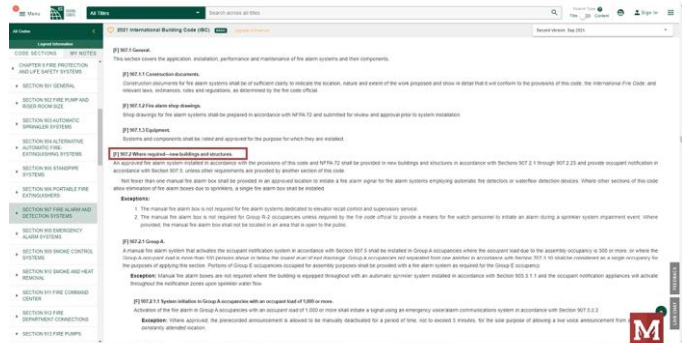


# EXAMPLE OF A FIRE ALARM SYSTEM REQUIREMENT

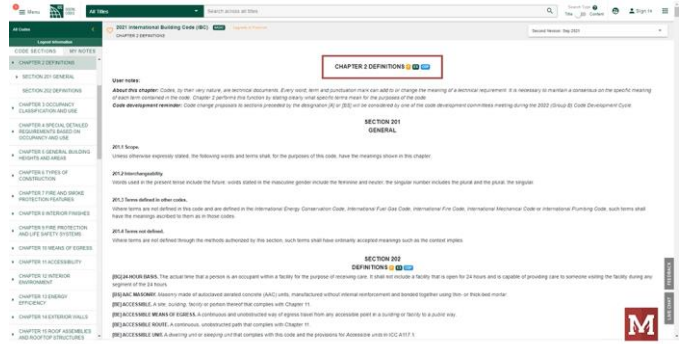

## NOTES

A large grid of dotted lines for taking notes, spanning the width of the page below the 'NOTES' header.



**907.2.1 Audible-see bellies.**  
For areas containing audible-see bellies shall be provided with an electronically supervised audible-see detection system installed within the audible-see facility and in public use areas outside of means egress, including public corridors and stairwells.  
**Exception:** Buildings equipped throughout with an automatic sprinkler system in accordance with Section 903.3.1.1, provided that the occupant notification appliances will activate throughout the notification zones upon approved signaling.

**907.2.2 Group E.**  
A manual fire alarm system that activates the occupant notification signal utilizing an emergency voice/alarm communication system meeting the requirements of Section 907.2.2 shall be installed in accordance with Section 907.4 and shall be installed in Group E occupancies. Where automatic sprinkler systems or smoke detectors are installed, such systems or detectors shall be connected to the building fire alarm system.  
**Exception:**  
1. A group E alarm system shall not be required in Group E occupancies with an occupant load of 50 or less.  
2. Emergency voice/alarm communication systems meeting the requirements of Section 907.2.2 shall not be required in accordance with Section 907.4 and shall not be required in Group E occupancies with occupant loads of 100 or less, provided that activation of the manual fire alarm system initiates an approved occupant notification signal in accordance with Section 907.5.  
3. Manual fire alarm boxes shall not be required in Group E occupancies where all of the following apply:  
3.1. Detector controls are provided to initiate detection.  
3.2. Addressable, supervised, proprietary and remote areas are provided by their detectors or other approved detection devices.  
3.3. Groups and manufacturers training books or videos are provided to their detectors or other approved detection devices.  
3.4. Manual activation is provided from a normally occupied location.  
4. Manual fire alarm boxes shall not be required in Group E occupancies where all of the following apply:  
4.1. The building is equipped throughout with an approved automatic sprinkler system installed in accordance with Section 903.3.1.1.  
4.2. The emergency voice/alarm communication system shall activate on approved signaling.  
4.3. Manual activation is provided from a normally occupied location.



NOTES

A large grid of dotted lines for taking notes.